


구멍용 겸용 멈춤링

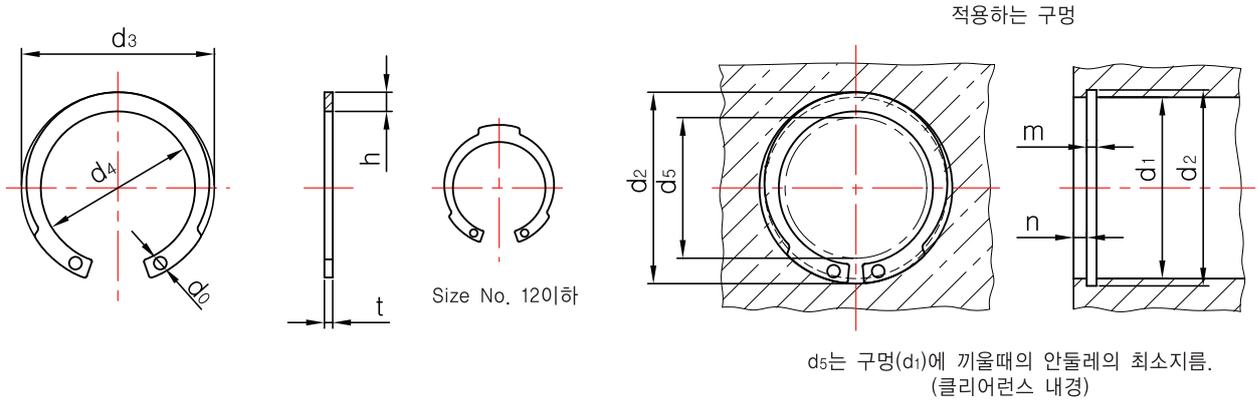

단위: mm

Size No.	멈춤링							적용하는 구멍							
	d3		d4	t		h	d0	보통 허용차	d5	d1	d2		m		n
	기준치수	허용차		기준치수	허용차						기준치수	허용차	기준치수	허용차	
IR	10	11.1	±0.18	7.7	1	±0.05	1.7	0.9	±0.3	5.9	10	10.4	+0.11 0	1.15	1.5
	11	12.2		8.6			1.8			6.6	11	11.4			
	12	13.3		9.7			1.8			7.6	12	12.5			
	13	14.1	10.9	1.6			9			13	13.6				
	14	15.1	11.7	1.7			9.8			14	14.6				
	15	16.2	12.6	1.8			10.6			15	15.7				
	16	17.3	13.5	1.9			11.4			16	16.8				
	17	18.3	14.3	2			12.2			17	17.8				
	18	19.5	15.3	2.1			13			18	19				
	19	20.5	16.1	2.2			13.8			19	20				
	20	21.5	16.9	2.3	14.5	20	21								
	21	22.5	17.7	2.4	15	21	22								
	22	23.5	18.7	2.4	16	22	23								
	24	25.9	20.7	2.6	17.5	24	25.2								
	25	26.9	21.5	2.7	18.5	25	26.2								
	26	27.9	22.3	2.8	19	26	27.2								
	28	30.1	24.1	3	20.5	28	29.4								
	30	32.1	25.7	3.2	22.5	30	31.4								
	32	34.4	27.4	3.5	23.5	32	33.7								
	34	36.5	29.1	3.7	25	34	35.7								
	35	37.8	30	3.9	26	35	37								
	36	38.8	30.8	4	26.5	36	38								
	37	39.8	31.6	4.1	27.5	37	39								
	38	40.8	32.4	4.2	28	38	40								
	40	43.5	34.7	4.4	30	40	42.5								
	42	45.5	36.3	4.6	31	42	44.5								
	45	48.5	38.9	4.8	33	45	47.5								
	47	50.5	40.7	4.9	35	47	49.5								
	48	51.5	41.5	5	36	48	50.5								
	50	54.2	44	5.1	38	50	53								
	52	56.2	45.8	5.2	40	52	55								
	55	59.2	48	5.6	42	55	58								
	56	60.2	48.8	5.7	43	56	59								
	58	62.2	50.4	5.9	44	58	61								
	60	64.2	52	6.1	46	60	63								
	62	66.2	53.6	6.3	47	62	65								
	63	67.2	54.4	6.4	48	63	66								
	65	69.2	55.8	6.7	49	65	68								
	68	72.5	58.5	7	52	68	71								
	70	74.5	60.1	7.2	53	70	73								
	72	76.5	61.7	7.4	55	72	75								
	75	79.5	63.9	7.8	57	75	78								
	78	82.5	66.3	8.1	59	78	81								
	80	85.5	68.9	8.3	61	80	83.5								
	82	87.5	70.5	8.5	62	82	85.5								
	85	90.5	72.7	8.9	64	85	88.5								
	88	93.5	75.1	9.2	67	88	91.5								
	90	95.5	76.7	9.4	68	90	93.5								
	92	97.5	78.3	9.6	70	92	95.5								
	95	100.5	80.5	10	72	95	98.5								
	98	103.5	82.9	10.3	75	98	101.5								
	100	105.5	84.5	10.5	76	100	103.5								

· 재질: S60CM~S70CM, SK5M, 스프링강, 스텐레스강(일부주문생산) · 경도: HRC44~53(SK5M 기준) · 표면처리: ALKAL이축착색 또는 인산염피막