


축용 검용 멈춤링

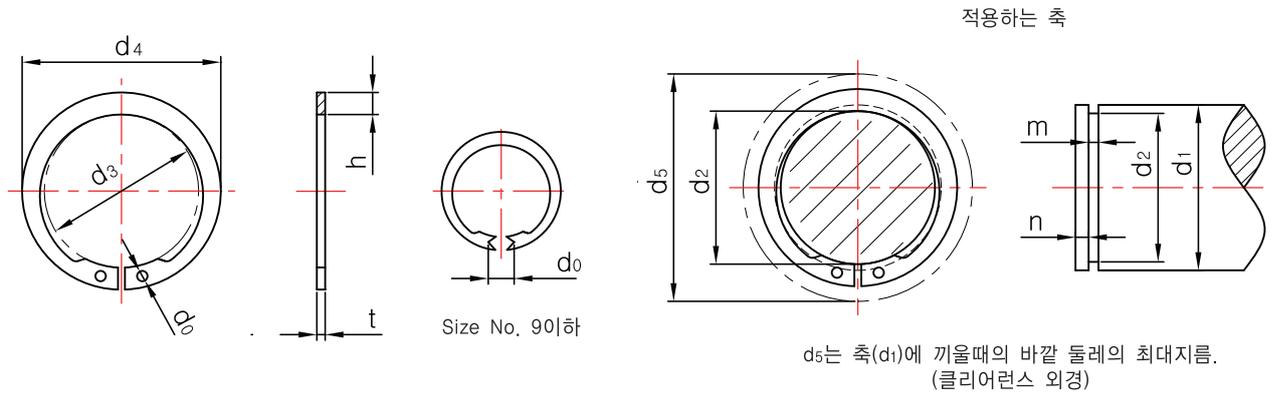

단위 : mm

Size No.	멈춤링								적용하는 축						
	d3		d4	t		h	d0	보통 허용차	d5	d1	d2		m		n
	기준치수	허용차		기준치수	허용차						기준치수	허용차	기준치수	허용차	
IS	6	5.6	+0.1 -0.2	8	0.5	±0.03	1.2	2.2	±0.2	8.9	6	5.7	-0.04	0.6	+0.1 0
	7	6.5		9.3	0.6	1.4	2.4	10.3		7	6.7	0	0.7		
	8	7.4		10.6	0.7	1.6	3	11.7		8	7.6	0	0.8		
	9	8.4	12	0.8	1.8	3.4	13.1	9	8.6	-0.06	0.95				
	10	9.3	±0.15	13.3	1	±0.05	2	1.2	±0.3	14.5	10	9.6	-0.09	1.15	
	11	10.2	14.4	2.1			16			11	10.5				
	12	11.1	15.5	2.2			17.2			12	11.5				
	13	12	16.6	2.3			18.4			13	12.4				
	14	12.9	17.5	2.3			19.4			14	13.4				
	15	13.8	±0.18	18.6	2.4	20.6	15	14.3	0	-0.11	1.35				
16	14.7	19.7	2.5	21.8	16	15.2									
17	15.7	20.9	2.6	23	17	16.2									
18	16.5	21.9	2.7	24.2	18	17									
19	17.5	23.1	2.8	25.4	19	18									
20	18.5	±0.2	24.3	1.2	±0.06	2.9	1.5	±0.4	27	20	19	0	-0.21	1.65	
21	19.5		25.5			3			28	21	20				
22	20.5		26.5			3			29	22	21				
24	22.2		28.6			3.2			31.5	24	22.9				
25	23.2		29.8			3.3			33	25	23.9				
26	24.2	31	3.4	34	26	24.9	+0.14 0								
28	25.9	33.1	3.6	36.5	28	26.6									
29	26.9	34.1	3.6	37.5	29	27.6									
30	27.9	35.3	3.7	38.5	30	28.6									
32	29.6	37.4	3.9	41	32	30.3									
34	31.5	±0.25	39.7	1.5	±0.07	4.1	1.8	±0.5	43.5	34	32.3	0	-0.25	1.9	
35	32.2	40.6	4.2			45			35	33					
36	33.2	41.6	4.2			46			36	34					
38	35.2	44	4.4			48			38	36					
40	37	46.2	4.6			51			40	38					
42	38.5	±0.4	48.1	1.75	±0.08	4.8	2	±0.7	54	42	39.5	0	-0.3	2	
45	41.5	51.3	4.9			57			45	42.5					
48	44.5	55.1	5.3			61			48	45.5					
50	45.8	56.8	5.5			63			50	47					
52	47.8	59	5.6			65			52	49					
55	50.8	±0.45	62.6	2	±0.09	5.9	2.5	±0.5	69	55	52	0	-0.35	2.2	
56	51.8		63.8			6			70	56	53				
58	53.8		66			6.1			72	58	55				
60	55.8		68.4			6.3			75	60	57				
62	57.8		70.8			6.5			77	62	59				
63	58.8	72	6.6	78	63	60	2.7								
65	60.8	74.4	6.8	81	65	62									
68	63.5	77.5	7	84	68	65									
70	65.5	79.9	7.2	87	70	67									
72	67.5	82.1	7.3	89	72	69									
75	70.5	±0.55	85.7	2.5	±0.08	7.6	3	±0.7	92	75	72	0	-0.35	3.2	
78	73.5		89.3			7.9			96	78	75				
80	74.5		90.5			8			98	80	76.5				
82	76.5		92.9			8.2			101	82	78.5				
85	79.5		96.5			8.5			104	85	81.5				
88	82.5	99.9	8.7	108	88	84.5	3								
90	84.5	102.3	8.9	110	90	86.5									
95	89.5	108.1	9.3	116	95	91.5									
100	94.5	113.9	9.7	122	100	96.5									

· 재질: S60CM~S70CM, SK5M, 스프링강, 스텐레스강(일부주문생산) · 경도: HRC44~53(SK5M 기준) · 표면처리: ALKALI흑착색 또는 인산염피막